


UV/VIS Spectrophotometer

Double Beam

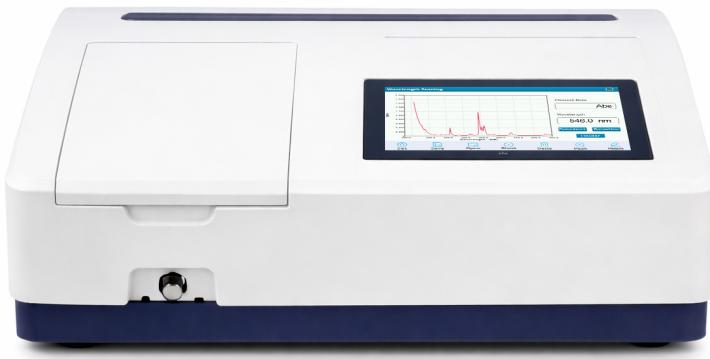



SALIENT FEATURES:

- With spectral scanning function
- Can measure upto 6 wavelengths at a single time
- Large colorful screen for ease, can scan wavelength directly on the device
- Parallel port & USB port
- Imported japanese lamps & sensor results in perfect measurements

This instrument is widely used in petroleum, chemical, pharmaceutical, sugar, refining, research and food industries. This spectrophotometer also has wide scope of use in related colleges, universities & scientific research institutions for meaning the photometric value of samples.

FUNCTIONS:

- Two detectors are used to measure sample and reference respectively and simultaneously
- Improved Circuit: Improved design prevents circuit fluctuations and stray light to ensure stability of the instrument.
- Sturdy Design: It uses a rigid base to ensure stability & reliability
- Large Colourful LCD Display: It sports a large display to show results and curves directly on the screen
- Multi functions in the software enables the user to toggle between variety of functions such as wavelength scanning, standard curve, kinetics, multi wavelength scanning, DNA/protein test
- Data can be saved in csv file. Data can be exported to a PC
- Has a function for filtering & smoothing the peaks of measurement

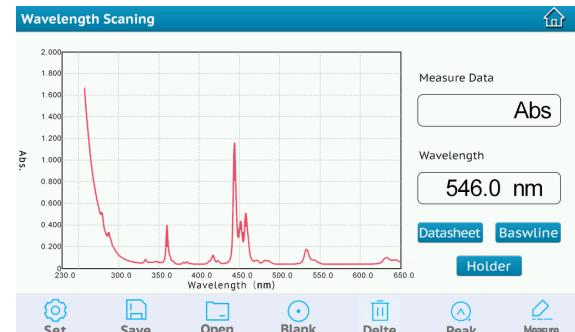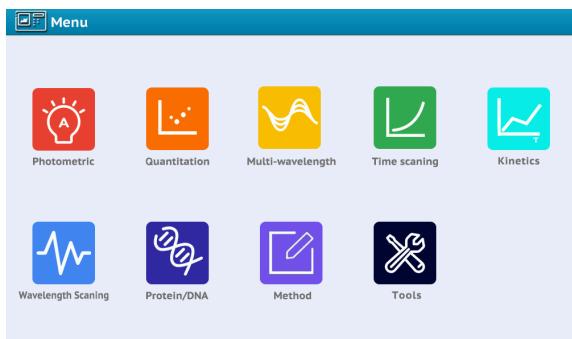

Model	UV-X100
Make	Galaxy
Bandwidth	1 nm
Cell Holder	Sample & reference cuvette holder (both 10mm)
Optical System	Double Beam (1200 lines/mm Grating)
Wavelength Range	190 ~ 1100 nm
Wavelength Accuracy	±0.1nm@656.1nm, ± 0.3 nm(all),
Wavelength Repeatability	± 0.2 nm
Scanning Speed	High, Medium, Low (Max. 3000 nm/min)
Photometric Range	-3 ~ 3A, 0~200%T, 0~9999C
Photometric Accuracy (T)	± 0.2%T
Photometric Repeatability	0.15%T, 0.001A (0-0.5A), 0.002A (0.5-1 A)
Stability	± 0.001 A/h (500 nm, preheating for 1 hr)
Photometric Accuracy(A)	≤±0.002A(0~0.5A), ≤±0.004A(0.5~1A), ≤±0.006A(>2.0)
Baseline Flatness & noise	± 0.001A/h, 0.0005A at 500nm
Stray Light	<0.03%T @ 220nm, 360nm
Data Output	USB, RS232
Printer Port	Parallel Port
Display	7" Large Colourful LCD
Lamps	Imported Xenon Lamp
Detector	Silicone Photodiode
Power Supply	AC 220V / 50Hz
Dimensions & Weight	590 x 475 x 250mm & 20 kg



STANDARD

ACCESSORIES:

- Software
- 10mm Glass Cuvette
- 10mm Quartz Cuvette
- Instruction Manual
- Power Cord